






Areas contain soils with 30 inches or more of provisionally useable material and have potential LPP or ultra-shallow conventional septic systems. These areas will contain small areas of soils with greater than 30 inches of suitable soil material that can be used for conventional septic systems.

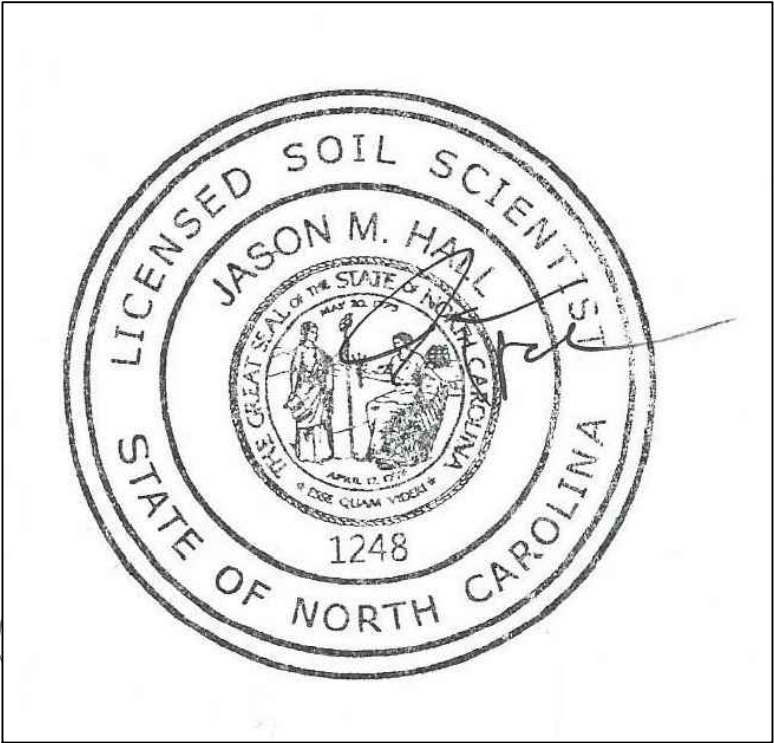

Areas contain soils with 24 to 29 inches or more of provisionally useable material and have potential LPP or ultra-shallow conventional septic systems. These areas will contain small areas of soils with greater than 30 inches of suitable soil material that can be used for conventional septic systems.

UN Unsuitable areas for Conventional or LPP subsurface septic systems.

*Soil boundary was sketched in the field and soil borings located by gps.

- *Septic system setbacks listed below for new lots.
- 1) 10' from property lines.
 - 2) 50' from wells for primary systems, 100' for saprolite..
 - 3) 50' from wells for repair systems, 100' for saprolite..
 - 4) 50' from surface waters (streams, ponds, lakes).
 - 5) 50' from Wet Ponds or Wet Detention, BMP's.
 - 6) 25' from dry detention or infiltration BMP's.

*Any mechanical disturbances such as grading, cutting and filling of the suitable soil areas can render areas unsuitable for future septic systems.


*See accompanying report for additional information.

*Base map acquired from Franklin County GIS, not a survey.

*Due to Soil Variability, CCSC cannot guarantee that the areas shown as suitable will be permitted by the local Health Department.

*The preliminary (approximate) soil lines cannot be used as legal descriptions for purposes of a land transfer or legal documentation.

*Additional field work may be required for a septic permit (septic system field layout/design)



Central Carolina Soil Consulting, PLLC
1900 South Main Street, Suite 110
Wake Forest, North Carolina 27587
Phone (919)569-6704 Fax (919)569-6703

Preliminary Soils Evaluation
~22-acres, Arthur Wilder Road
Franklin County, North Carolina

Job# : 4468
Drawn By : JH
Date : 02/23/2023
Revision: