

07.1007/39

**Wayne County (Environmental) – Improvements Permit**

301 N. Herman Street, Box CC, Goldsboro, NC 27530  
 Phone:(919) 731-1174  
 Fax:



**Permit No:** 14070104092  
**Status:** INCOMPLETE

**Appl. Dt.:**  
**Status Dt.:** 9/2/2014

**Exp. Dt.:**

**Owner Information**

**Name** : Daniel Coppage  
**Address** : 120 Pate Cir  
 Goldsboro NC 27530  
**Phone(W)** :  
**Phone(H)** :  
**Phone(M)** :

**Property Information**

**PIN #** : 072670506995  
**Address** : 132 Pate Cr  
 Goldsboro NC 27530  
**Acreage** : 0  
**Subdivision** : Lt 39 Quaker Neck Est #3  
**Lot #** :  
**Directions** :  
**Watershed district** :

**Site Details**

**System Classification** :  
**System Description** :  
**Line Length** :  
**Line Depth** :  
**Nitrification Sq. Ft.** :  
**Tank #1** :  
**Tank #2** :  
**Tank #3** :

**Applicant Information**

**Name** : Daniel Coppage  
**Address** : 120 Pate Cir  
 Goldsboro NC 27530  
**Phone(W)** :  
**Phone(H)** :  
**Phone(M)** :

**Occupant Information**

**Name** : Daniel Coppage

**Water Details**

**System** : New  
**Source** : Public

**Property Characteristics**

**Type of establishment** : Residential dwelling units  
**Number of establishment** : 3 Bedrooms  
**Septic GPD** : 360  
**Basement** : No  
**Basement Bath** : No  
**Garbage Disposal** : No  
**Multiple Dwelling Units** : No

**Property Notes** :

**Permit Information**

**Septic System Requested** :  
**System Description Requested** :

**Notes** : SCANNED INTO CPS

**Inspections Conducted**

Inspections	Signed Off/User ID	Date	Status	Reason

**Payment Information**

Permit	Receipt No.	Fee	Ref#1	Amount	Status	Ref#2	Amount	Status	Ref#3	Amount	Status
MAINPERMIT		250.00									
<b>Total</b>			250.00								


WAYNE COUNTY HEALTH DEPARTMENT

REF. NO. <u>5278</u>	MOBILE HOME IMPROVEMENT PERMIT	DATE <u>10-20-93</u>	TWP. <u>Fork</u>	ID. NO. <u>07.1007AC 39</u>
REQUESTER <u>Benton &amp; Associates</u> <u>107 Shamrock Rd.</u> <u>Goldsboro NC</u>	OWNER <u>Some</u>		TELEPHONE <u>735-3579</u>	
SPECIFICATIONS <u>3 BR House (132 Pote Circle)</u>		WATER SUPPLY: PUBLIC <input checked="" type="checkbox"/> ; PRIVATE <input type="checkbox"/>		
LOCATION/DIRECTIONS <u>SR1007 / Quaker Neck Ept. / Sect 3 / Lot 39</u>				
FEE <u>90-</u>	LAND SIZE	SIGNATURE OF OWNER OR AUTHORIZED AGENT <u>Richard M. Benton</u>		

The above signature indicates that I have read, understand, and agree with all provisions and information as outlined on the back side of this form, and authorizes Wayne County Health Department Personnel to go on this property for evaluation.

# BEDRMS <u>3</u>	DISPOSAL <u>NA</u>	OTHER <u>NA</u>	TYPE SYS <u>M</u>
SZ TANK <u>900</u>	SZ CHAMB <u>NA</u>	NITRIFI <u>240'x3'</u>	OPER REQ <u>-</u>
SITE LOC <u>1.20</u>	CONTROVERSIAL SITUATION Please examine plot plan carefully.		<u>720 ft<sup>2</sup></u> <u>Repair Area Not Required - Some Repair in front</u>
REMARKS:	<u>3-80'x3' lines</u>		

- SEE PLOT PLAN
- \* Install system in location exactly as shown on plot plan.
  - \* Nitrification lines no deeper than 18 inches at any point.
  - \* House must be raised to get gravity flow to tank - or it may need to be moved back.
  - \* The dirt on the ditch bank should be leveled off before septic system installation.

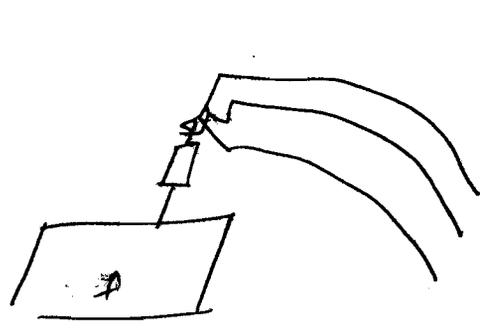

Drop off

**PAID**

DATE 10-20-93 AMT. 90-

RECEIPT # 015982 CK # Cash

REC'D BY rb

ENV. SPECL. Summerlin

No REPAIR

DATE ISSUED <u>10/21/93</u>	ENVIRONMENTAL HEALTH SPECIALIST <u>John R. Summerlin</u>
DATE APPROVED <u>11/10/93</u>	ENVIRONMENTAL HEALTH SPECIALIST <u>John R. Summerlin</u>
INSTALLER OF SYSTEM <u>Thomas</u>	

CONTROVERSIAL SITUATION  
Contact Sanitarian before  
installing system.

NOTE: the location of  
the "D" Box AS  
shown

CONTROVERSIAL SITUATION  
Contact Sanitarian before  
installing system.

Note!  
The dirt on the  
Ditch Bank should  
be pulled away  
& leveled before  
Septic System  
Installation

\*Nitrification Lines  
No deeper than  
18 inches At any point.

Center of  
Ditch  
is Property  
Line

Unstable Due To  
Massive  
Soils


50' to D-Box  
from rear property  
Line

Low Area

80' to D-Box

39  
3-80'x3' lines  
720ft±

\*House Must Be Raised  
or moved Back If  
Gravity flow Cannot  
Be achieved.

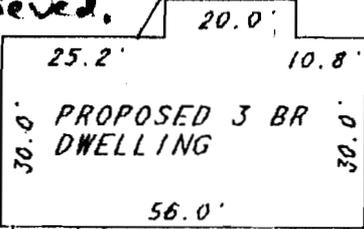

Possible  
Repair  
Area

CONTROVERSIAL SITUATION  
Contact Sanitarian before  
installing system.

CURVE C 1  
DELTA 14°31'01"  
RADIUS 130.00'  
ARC 32.94'  
S 09°28'43"E  
CHORD 32.85'

CONTROVERSIAL SITUATION  
Contact Sanitarian before  
installing system.

Public Water

PAID

PATE CIRCLE (60' R/W)

DATE 10-20-93 AMT. 90-  
RECEIPT # 015982 CK # cash  
REC'D BY sb  
PRE. SPEC. Summerlin

PRELIMINARY PLAT  
NOT FOR RECORDATION  
SALE OR CONVEYANCE

DRAFTER: RMB

SCALE: 1" = 30'



BENTON & ASSOCIATES  
LAND SURVEYING AND MAPPING  
GOLDSBORO, N.C. PHONE (919) 735-0440

NORTH CAROLINA  
I, RICHARD M. BENTON, CERTIFY THAT THIS  
MAP WAS PREPARED UNDER MY SUPERVISION  
FROM AN ACTUAL FIELD SURVEY MADE BY  
; THAT THE  
RATIO OF PRECISION AS CALCULATED IS  
1:10,000; THAT THE BOUNDARIES NOT  
SURVEYED ARE SHOWN AS BROKEN LINES  
WHICH WERE PLOTTED FROM INFORMATION  
AS REFERENCED HEREON AND THAT THIS  
MAP IS CORRECT TO THE BEST OF MY  
KNOWLEDGE AND BELIEF.

PRELIMINARY PLOT PLAN FOR

AUBURN COOKE

BEING ALL A0 LOT 39 QUAKER  
NECK ESTATES, SECTION THREE

FORK TWSP. WAYNE CO. N.C.

RICHARD M. BENTON RLS  
REGISTRATION NO. L-3354

WITNESS MY HAND AND SEAL THIS 20  
DAY OF OCTOBER, A.D. 1993

**SITE / SOIL EVALUATION  
FOR  
SANITARY SEWAGE SYSTEM**

OWNER: Auburn Cooke PHONE: 735 3579 DATE REQUESTED: 10-20-93 DATE EVALUATED: \_\_\_\_\_  
 ADDRESS: 107 Shemrock Rd. Doholstew PROPERTY IDENTIFICATION NO.: 07.1007AC39  
 COUNTY: \_\_\_\_\_ PROPERTY SIZE: \_\_\_\_\_ PROPOSED FACILITY: \_\_\_\_\_  
 LOCATION OF SITE: \_\_\_\_\_  
 WATER SUPPLY: On-Site Well \_\_\_\_\_ Community \_\_\_\_\_ Public \_\_\_\_\_ EVALUATION BY: Auger Boring \_\_\_\_\_ Pit \_\_\_\_\_ Cut \_\_\_\_\_

LANDSCAPE POSITION	Group	TEXTURE	App. Rate	LEGEND		STRUCTURE	MINERALOGY
				MOIST	CONSISTENCE		
R - Ridge	I	s - sand	1.2-0.8	vfr - very friable	WET	sg - single grain	1:1, 2:1, mixed
S - Shoulder slope		fs - loamy sand		fr - friable		Ns - non-sticky	
L - Linear slope	II	sl - sandy loam	0.8-0.6	f - firm	Ss - slightly sticky	cr - crumb	
FS - Foot slope		l - loam		vf - very firm	S - sticky	gr - granular	
N - Nose slope	III	sil - silt	0.6-0.3	vfr - very firm	Vs - very sticky	abk - subangular blocky	
H - Head slope		sil - silt loam		efl - extremely firm	Np - non-plastic	abk - angular blocky	
Cc - Concave slope	IV	sicl - silty clay loam	0.4-0.1		Sp - slightly plastic	pl - platy	
Cv - Convex slope		cl - clay loam			P - plastic	pr - prismatic	
T - Terrace		scl - sandy clay loam			Vp - very plastic		
FP - Flood Plain		sc - sandy clay					
		sic - silty clay					
		c - clay					

Use the above standard abbreviations.

- NOTES:**  
 Horizon Depth - in inches  
 Depth of Fill - in inches from land surface  
 Restrictive Horizon - thickness and inches from land surface  
 Saprolite - S (suitable) or U (unsuitable)

- NOTES:**  
 Soil Wetness - inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation  
 Classification - S (suitable), PS (provisionally suitable) or U (unsuitable)  
 Long-Term Acceptance Rate - gal/day/ft<sup>2</sup>

DHS 2601 (Revised \_\_\_\_\_)  
 Sanitation Branch (Review \_\_\_\_\_)

